


**LEVELC-2000** ELEVATOR INTERIORS





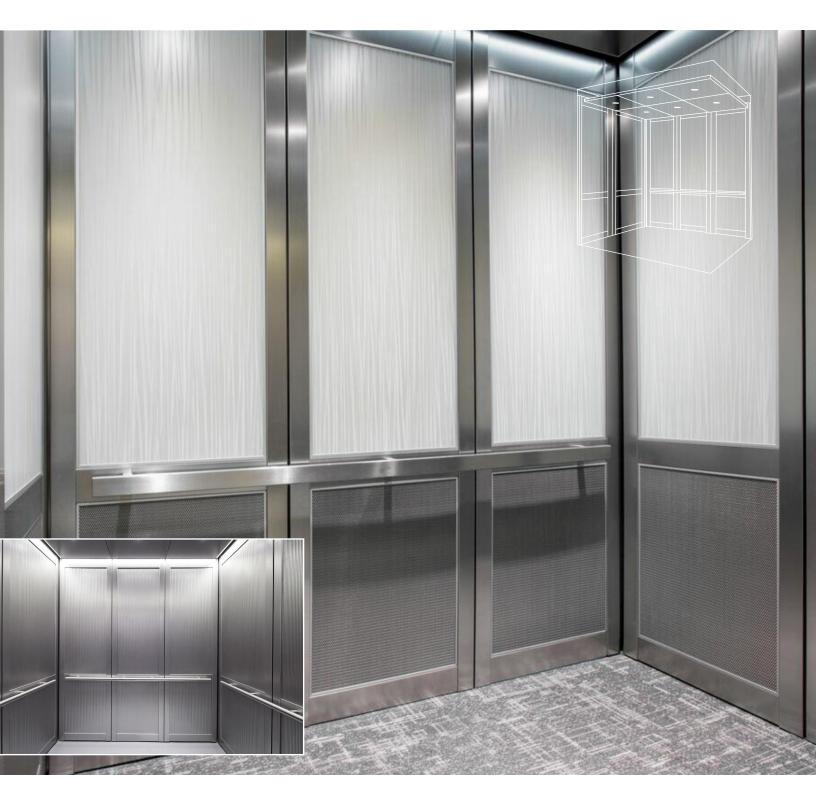

### PRODUCT DATA

LEVELc Elevator Interiors feature a unique stile, rail and inset design and versatile material options. Wall panels consist of decorative insets and stiles/rails bonded to a fire-rated substrate. Inset and stile/rail materials draw from our extensive Surfaces palette and can be mixed and matched in numerous ways to create visually exciting, highly durable elevator interiors. Designed for easy installation, LEVELc-2000 uses a z-clip mounting system.


Beyond LEVELc, the F+S Elevator Interiors program gives you unparalleled creative freedom for meeting the aesthetic, performance and budgetary requirements of virtually any environment. Ideal for new or modernization projects, the program includes three distinct families that suit diverse field conditions without sacrificing ease of specification, installation, maintenance, or breadth of material choices. Learn more about the entire program on our website.

## SYSTEM COMPONENTS

Standard: Wall Panels, Reveals, Installation Hardware Optional: Handrails, Crash Rails, Elevator Ceiling with Light Fixtures and Emergency Lighting Power Source

# SYSTEM COMPONENTS MAP

Standard configuration shown.

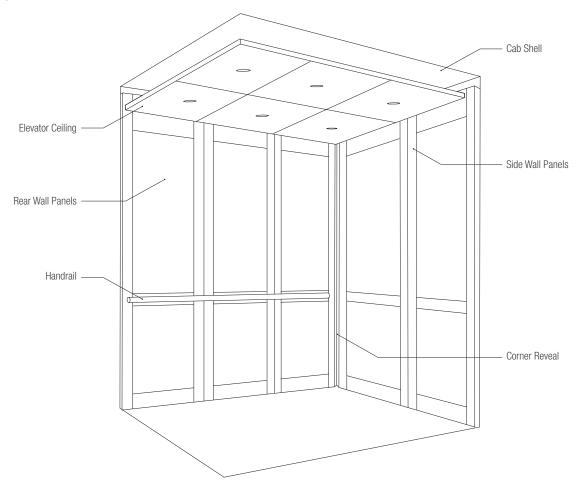

#### T 1.800.451.0410 | F 412.385.4715 | www.forms-surfaces.com

FORMS+SURFACES®

## STANDARD INSET MATERIAL OPTIONS

VIVIDGLASS CASTGLASS LEVELS GLASS VividGlass laminated glass has tremendous creative potential. Offering numerous ways to CastGlass Levels glass is artisanal kiln cast glass laminated with color and graphic transform spaces with colors, patterns and graphics, many of our VividGlass designs can interlayers. Four Levels families, each with its own textural aesthetic, bring creative plays be specified as wall panel insets including selections from our ViviChrome, ViviGraphix, of color, texture and light to walls, columns, elevator interiors and more. Please refer to ViviSpectra, ViviStone, ViviStrata and ViviTela families. Please refer to the individual the Cadence Levels. Classic Levels. Intervals Levels, and Profile Levels Product Data VividGlass Product Data Sheets for swatches and additional information. Sheets for design swatches and additional information. STAINLESS STEEL FUSED METAL Stainless Steel in all of our standard finishes can be specified for panel insets. A variety Fused Metal is Forms+Surfaces' exclusive line of colored stainless steel. Created by of optional patterns, can also be specified for added visual interest and enhanced fusing titanium alloys to the stainless substrate at the molecular level, Fused Metal functionality. Impression patterns bring dimension to the surface; eco-friendly Eco-Etch® provides the durability and low maintenance of stainless steel in a rich range of colors. patterns offer standard and custom options. Please refer to the Stainless Steel Product Please refer to the Fused Metal Product Data Sheet for color, finish, and pattern swatches Data Sheet for finish and pattern swatches and additional information. and additional information. BONDED METAL LINQ WOVEN METAL Ling is Forms+Surfaces' answer to woven metal. CrossLing patterns consist of flat and/ Bonded Metal castings are light in weight yet extremely durable. The material's high or round stainless steel wires interwoven to create distinctive textures and designs. relief, highly detailed surfaces have the character and appearance of solid metal. A wide Please refer to the Ling Product Data Sheet for additional information. range of patterns, metal colors and patinas offer a striking breadth of design possibilities. Please refer to the Bonded Metal Product Data Sheet for complete information. BONDED QUARTZ WOOD VENEER Bonded Quartz combines ceramic microspheres and a fiber-reinforced polymer matrix to All veneers are finished with three coats of CAB acrylic lacquer for superior abrasion form a material that is lightweight, durable and easy to clean. Standard colors are White resistance and non-yellowing performance while maintaining the richness and authenticity of genuine wood. Please refer to the Wood Veneer Product Data Sheet for and Charcoal; custom colors are also available. A variety of sculptural patterns complete the design options. Please refer to the Bonded Quartz Product Data Sheet for complete material options and additional information. information.

## MATERIAL OPTIONS PER ELEMENT

Wall panels consist of stiles, rails, and decorative inset materials on a fire-rated substrate. Wall panel inset and stile & rail materials draw from our extensive Surfaces palette; several are also available for F+S Elevator Ceilings, as shown below.

|                             | PANEL STILES & RAILS   | PANEL INSETS | F+S ELEVATOR CEILINGS* |  |  |
|-----------------------------|--|--------------|------------------------|--|--|
| VIVIDGLASS                  |  | ٠            |                        |  |  |
| CASTGLASS LEVELS GLASS      |  | ٠            |                        |  |  |
| STAINLESS STEEL             | •  | ٠            | •                      |  |  |
| FUSED METAL                 | •  | •            | •                      |  |  |
| LINQ WOVEN METAL            |  | ٠            |                        |  |  |
| BONDED METAL                | •  |              |                        |  |  |
| BONDED QUARTZ               | •  |              |                        |  |  |
| WOOD VENEER                 | •  |              |                        |  |  |
| THIRD PARTY INSET MATERIALS | Customers sometimes wish to specify their own inset materials to match lobby walls or other areas on specific projects. This is generally feasible, provided the materials meet certain weight and dimensional requirements. Please call for more information. |              |                        |  |  |

\*Refer to pages 4-5 for more information or to the Elevator Ceilings Product Data Sheet for complete details.

#### T 1.800.451.0410 | F 412.385.4715 | www.forms-surfaces.com

FORMS+SURFACES®

© 2023 Forms+Surfaces® | All dimensions are nominal. Specifications and pricing subject to change without notice. For the most current version of this document, please refer to our website at www.forms-surfaces.com.

PRODUCT DATA




## COMPATIBILITY & WEIGHT

PRODUCT DATA

| SHELL COMPATIBILITY   | WEIGHT INFORMATION  |
|---|---|
| <ul> <li>LEVELc Elevator Interiors can be specified for elevators of any size, weight capacity, or door configuration. Most interiors are installed in steel elevator shells but can also be supplied with appropriate screws for installation in wood shells.</li> <li>Most elevator shells are found to be out-of-square to some degree. LEVELc wall panels and corner reveals have sufficient tolerances built into them to easily accommodate the vast majority of out-of-square conditions or other dimensional irregularities.</li> </ul> | <ul> <li>LEVELc-2000 Elevator Interior panels weigh up to approximately 3.45 lbs. per square foot.</li> <li>Ceilings (including lights and structural elements) weigh approximately 2.97 lbs. per square foot.</li> <li>Handrail and crash rail weights vary by series and length.</li> </ul> |
|   | • Estimated total weights for customer-specified cab interiors can be provided by<br>Forms+Surfaces once shell dimensions, material selections and other system options<br>are specified.   |

# SYSTEM COMPONENTS

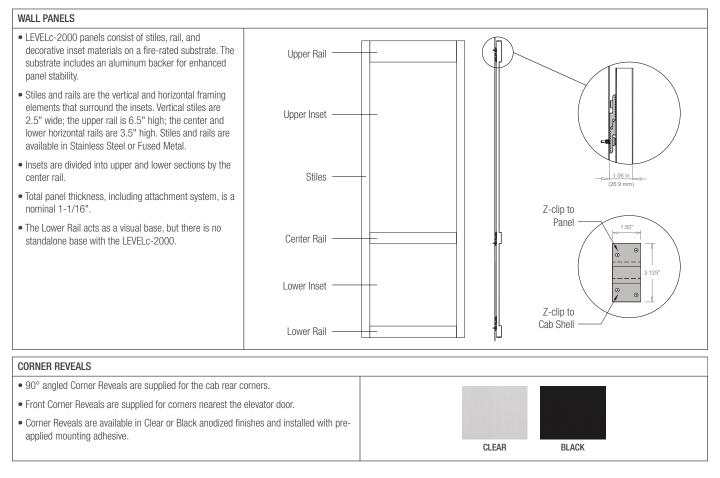

# HANDRAILS & CRASH RAILS

Handrails and crash rails can be specified for elevator interior back walls and/or side walls. For information on the full range of options, refer to the separate Elevator Handrails & Crash Rails Product Data Sheet.

#### T 1.800.451.0410 | F 412.385.4715 | www.forms-surfaces.com

FORMS+SURFACES®

## ELEVATOR CEILINGS

PRODUCT DATA

Our standard elevator ceiling is a six-panel suspended island design with six low-voltage, high-efficiency LED downlights or high-output LED perimeter lighting. In addition, LED downlights can be used in combination with either LED perimeter accent lighting or high-output LED perimeter lighting. Our elevator ceilings can support a maximum of nine downlights, depending on ceiling size. For more information, please see the Elevator Ceilings Product Data Sheet.

| CEILING OPTIONS   | CEILING INSTALLATION  | LIGHTING  |
|---|---|---|
| <ul> <li>Our standard elevator ceiling panels consist of Stainless<br/>Steel or Fused Metal decorative faces applied to a<br/>structural backer with black reveals. Any of our standard<br/>Stainless Steel or Fused Metal finishes may be specified<br/>for panel faces.</li> <li>The ceiling mounting extrusion is extruded aluminum<br/>with a clear anodized finish.</li> </ul> | <ul> <li>The ceiling uses a side-mount installation system that attaches the ceiling to the upper side walls of the elevator shell. This system makes the ceiling very easy to install and provides a generous range of adjustment to align the ceiling with the wall panels.</li> <li>A top-mount ceiling option that incorporates track-adjustable tie rods is available for large elevators and elevator configurations not conducive to the side-mount standard.</li> </ul> | <ul> <li>All lighting systems include a power supply, wire harnessing and an integrated LED dimmer. Lighting systems come pre-wired with a 12 foot lead to allow for mounting to top of cab shell.</li> <li>A dedicated input circuit is required for ceilings that are specified with a lighting option.</li> <li>LED Perimeter lighting will stay illuminated if a single diode fails.</li> </ul> |
|   | • A minimum clearance of 8" from the cab shell canopy to the visible ceiling face is necessary for installation.  |   |

# ELEVATOR CEILING LIGHTING OPTIONS

| LE  | LED DOWNLIGHTS ONLY                         |   | LE | LED DOWNLIGHTS + PERIMETER LIGHTING   |        | R LIGHTING | LED PERIMETER LIGHTING ONLY        |  |
|-----|---|---|----|---|--------|------------|------------------------------------|--|
|     | 0   | 0 | 0  |   | о<br>О | 0          | 0                                  |  |
|     | 0   | 0 | 0  |   | 0      | 0          | 0                                  |  |
| • [ | Low-voltage, high-efficiency LED downlights |   | a  | <ul> <li>When used with LED downlights, either LED perimeter<br/>accent lighting or high-output LED perimeter lighting<br/>may be specified.</li> </ul> |        |            | High-output LED perimeter lighting |  |

# ELEVATOR CEILING ILLUMINATION\*

| Lighting Options                    | Light Reading in foot candles (fc) |                              |                                |  |  |
|-------------------------------------|------------------------------------|------------------------------|--------------------------------|--|--|
| Lighting Options                    | At Threshold, on the ground        | Center of Cab, on the ground | Center of Cab, 36" above floor |  |  |
| LED Downlights Only                 | 29.8                               | 45.5                         | 62.5                           |  |  |
| LED Downlights + Perimeter Lighting | 37.5                               | 57.7                         | 75.4                           |  |  |
| High-Output LED Perimeter Only      | 17.1                               | 17.7                         | 24.3                           |  |  |

\*Foot candle readings are dependent on finishes, colors, and/or reflectivity of the surfaces in the cab. The values shown are minimums.

#### T 1.800.451.0410 | F 412.385.4715 | www.forms-surfaces.com

# FORMS+SURFACES®



# LEVELC-2000 ELEVATOR INTERIORS

**EMERGENCY & VENTILATION** 

PRODUCT DATA

| EMERGENCY LIGHTING   | EMERGENCY EXIT  |
|--|---|
| Emergency lighting is included in the standard elevator ceiling lighting system, unless otherwise specified in writing. The emergency lighting system incorporates an additional power supply with a battery to power the emergency lights in the event of a main power failure. The power supply includes an automatic battery charger, test switch, low battery voltage circuit, and alarm terminals. The emergency lights are integrated into the standard downlight system; any of the downlights, as specified, can act as the emergency light. In ceilings without downlights, a separate emergency lighting system will be located at the front of the cab, unless otherwise specified. | The emergency exit can be placed anywhere in the ceiling<br>as needed to line up with the exit opening in the cab shell<br>canopy. The Design Guide asks you to detail the exact<br>placement and this information will be verified via approval<br>drawings. |
| VENTILATION  | FIRE RATINGS  |
| Elevator Interiors are designed to accommodate most standard vent configurations. Unusual or non-standard ventilation requirements should be brought to our attention and detailed in the approval drawings to ensure compliance once material is installed.   | Ceiling panel backer materials and all Stainless Steel and<br>Fused Metal are generally considered to be Class A/I fire-<br>rated for smoke development and flame spread.   |

## **DELIVERY & INSTALLATION**

| DELIVERY   | ELEVATOR INTERIOR INSTALLATION | WALL PANEL REPLACEMENT                            |  |
|--|--------------------------------|---|--|
| for each individual cab arrive in a single crate, unless | 5                              | vandalism, replacement panels can be ordered from |  |

# CODE COMPLIANCES

Elevator wall panels, bases, handrails, crash rails, and ceilings comply with the following codes and guidelines:

| ASME A17.1-2010: Safety Code for Car Enclosures, Car Doors and Gates, and Car Illumination - Section 2.14 |
|---|
| 2.14.1.2 - Securing of Enclosures   |
| 2.14.1.5 - Top Emergency Exits  |
| • 2.14.1.8 - Glass in Elevator Cars   |
| 2.14.2.1 - Material for Car Enclosures, Enclosure Linings, and Floor Coverings                            |
| • 2.14.2.3 - Ventilation  |
| 2.14.2.4 - Headroom in Elevator Cars  |
| 2.14.7.4 - Protection of Light Bulbs and Tubes  |
| 2001 California Building Code, Chapter 30   |
| • 3003.4.7 - Car Inside*  |
| • 3003.4.12 - Handrails   |
| Americans with Disabilities Act Accessibility Guidelines (ADAAG)  |
| 4.10.9 - Floor Plan of Elevator Cars*   |
|   |

\*Complies when installed in most common sizes of passenger cabs and service cabs. Purchasing party is responsible for ensuring that finished installation maintains minimum floor dimensions required by ADA guidelines and applicable local codes.

## T 1.800.451.0410 | F 412.385.4715 | www.forms-surfaces.com

# FORMS+SURFACES®



## **RELATED PRODUCTS**

PRODUCT DATA

| LEVELc-1000 ELEVATOR INTERIORS   | LEVELC COLUMN SYSTEM  | ELEVATOR DOOR SKINS  |  |
|--|---|--|--|
| LEVELc-1000 Elevator Interiors feature stainless steel<br>and Fused Metal wall panels in a variety of finishes and<br>patterns. Please refer to the LEVELc-1000 Elevator Interior<br>Product Data Sheet for additional information.                      | The LEVELc Column System is available in the same materials and finishes as those offered for LEVELc-2000 Elevator Interiors. Please refer to LEVELc Column System Product Data Sheet for additional information.                                     | Forms+Surfaces Elevator Door Skins are available in many<br>of the same materials and finishes as those offered for<br>LEVELc-2000 Elevator Interiors. Please refer to our Elevator<br>Doors Product Data Sheets for additional information. |  |
| LEVELr ELEVATOR INTERIORS  | LEVELe ELEVATOR INTERIORS   | ARCHITECTURAL ACCENTS  |  |
| LEVELr Elevator Interiors unite sophisticated design<br>possibilities, a frameless panel aesthetic, and extensive<br>material, trim, and LED options. Please refer to the<br>LEVELr Elevator Interiors Product Data Sheet for additional<br>information. | LEVELe Elevator Interiors represent a versatile panelized<br>system based on lightweight aluminum framed panels<br>and extensive material options. Please refer to the LEVELe<br>Elevator Interiors Product Data Sheet for additional<br>information. | Coordinating sheet goods are available for headers, jams, returns, transoms and other architectural features. Please refer to our assortment of Surfaces Product Data Sheets for additional information.                                     |  |

# CUSTOM ELEVATOR INTERIORS

If your design requirements go beyond the standard LEVELc configuration, material and finish offerings, customized versions are available for an additional charge. Please call us to discuss your needs.

# LEAD TIME

Standard lead times are approximately 6-8 weeks, however, lead times can vary depending on the specifics of the products involved, the scope of supply and scheduling capacity at time of order approval. Please contact us to discuss your specific timing requirements.

## **TECHNICAL SUPPORT & PROJECT MANAGEMENT**

Because each project is unique, our knowledgeable support team is ready to help. Our technical sales, engineering, sustainability, and project management professionals regularly assist our clients worldwide. Please contact us at 800.451.0410 or sales@forms-surfaces.com to discuss your project.

## HOW TO SPECIFY

Visit <u>www.elevatordesignstudio.com</u> to configure your elevator interior using the Elevator Design Studio, our interactive online design tool that puts creative control at your fingertips. The intuitive step-by-step format lets you choose an elevator interior configuration, apply materials and finishes from our extensive Surfaces library, view your progress in realistic renderings, and request budget pricing - all with a few simple clicks.