

# TANGENT™ TABLE ENSEMBLE

FREESTANDING INSTALLATION INSTRUCTIONS

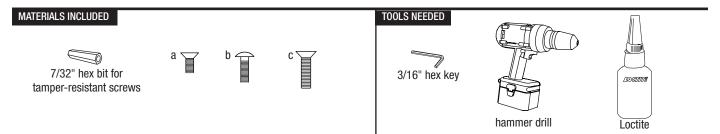

STEP BY STEP FOR ALL FREESTANDING TANGENT TABLE ENSEMBLES (SETAN-4BS SHOWN)

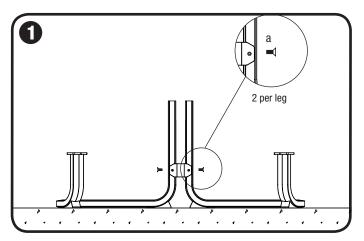


# a deperture of the second of t


# Attach legs to central hub

 Attach legs to central hub with 1/4"-20 x 3/4" flat socket-cap screws (a) using drill and 7/32" hex bit for tamper-resistant screws (provided).

# Attach top bracket to legs

 Attach top bracket to legs with 1/4"-20 x 3/4" flat socket-cap screws (a) using drill and 7/32" hex bit for tamper-resistant screws.

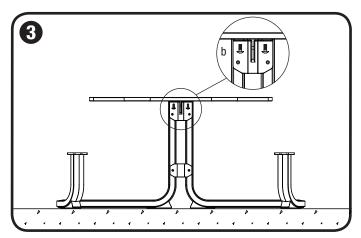



### Attach table top to top bracket

 Attach table top to top bracket with 3/8"-16 x 3/4" button head cap screws (b) using drill and 7/32" hex bit for tamper-resistant screws. Note that 4-seat ensembles will use 8 flat socket-cap screws, and 6-seat ensembles will use 6 flat socket-cap screws.

### Attach seats to seat cradle brackets

 Attach seats to seat cradle brackets with 3/8"-16 x 3/4" button head cap screws (b) using a drill and 7/32" hex bit for tamperresistant screws. Note that the indicator arrow on the seat cradle bracket should be pointing towards the front of the seat.


T 800.451.0410 | www.forms-surfaces.com


FORMS+SURFACES®

# **TANGENT™ TABLE ENSEMBLE**

FREESTANDING INSTALLATION INSTRUCTIONS

## STEP BY STEP FOR ALL FREESTANDING TANGENT TABLE ENSEMBLES (SETAN-4BS SHOWN)

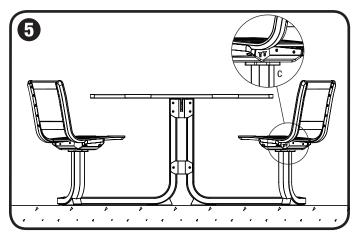



# Attach seats to legs

 Attach seat cradles to legs with with 3/8"-16 x 1" flat socket cap screws (c) using a drill and 7/32" hex bit for tamper-resistant screws.

# **Tighten screws**

• Tighten all screws until snug.